
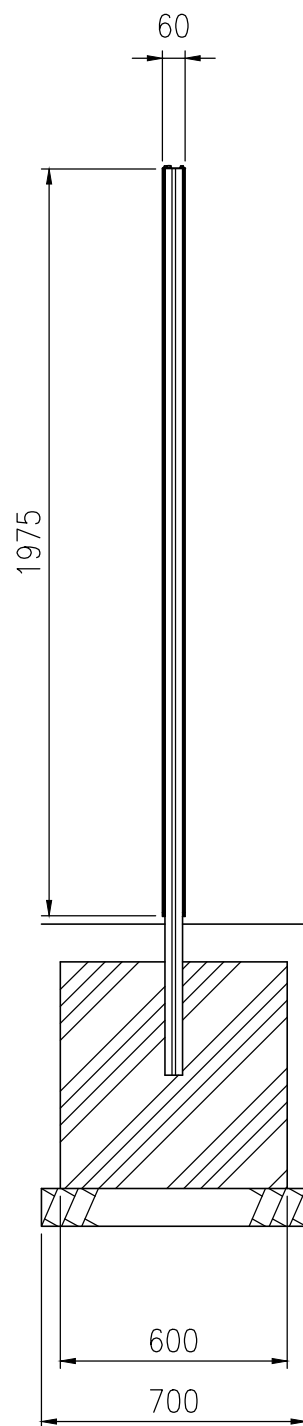




呼び寸	板材寸法	表示有効寸法
2060	H1975×W610	H1960×W600

Technical drawing of a double-flange coupling (2重フランジ継手) showing dimensions and callouts. The drawing is a cross-sectional view of the coupling, which consists of two flanges (1) and two gaskets (2). The central part of the coupling is divided into two sections, each with a different hatching pattern (3 and 4). The dimensions are as follows:

- Overall length: 610
- Length of the coupling body: 602
- Length of the flange: 550
- Length of the gasket: 26
- Length of the coupling body (effective): 600 (表示有効)
- Length of the flange (effective): 22
- Length of the gasket (effective): 67
- Length of the coupling body (pitch): 577 (削孔ピッチ)
- Length of the coupling body (total): 644
- Length of the flange (total): 510
- Length of the gasket (total): 67
- Radius of the flange: R50
- Height of the coupling: 60

Callouts 1 through 8 point to specific parts of the coupling:

- 1: Flange
- 2: Gasket
- 3: Coupling body (hatched)
- 4: Coupling body (hatched)
- 5: Coupling body (hatched)
- 6: Coupling body (hatched)
- 7: Coupling body (hatched)
- 8: Coupling body (hatched)

断面詳細 S=1/2

品 種	アーバンプラスサイン
品 番	UPS-A2060
図面番号	KRSH18001※1